SprayFoamSystems

ProPak

COMMERCIAL OR RESIDENTIAL
200 SERIES







Spray Foam Insulation | Concrete Lifting



SprayFoamSystems

1502 Airport Road
Greensboro, Georgia
(877) 737-4362
sales@sprayfoamsys.com
www.sprayfoamsystems.com

FOAM & POLYUREA
GRACO
TOP 20 DISTRIBUTOR
2019

SprayFoamSystems

ProPak

(877) 737-4362

200 SLIDER SERIES

DESIGNED FOR THE RESIDENTIAL AND COMMERCIAL INSULATOR

The Spray Foam Systems ProPAK 200 Slider Series of Spray Foam Rigs are a great rig for the professional insulator looking to start off in the spray foam business or add to your existing fleet. The E-20 Reactor 3 Katalyst is capable for spraying up to 20 lbs. per minute of material and features three models. The Reactor 3 Katalyst software communicates with the Core E1 pumps to eliminate off ratio spraying, will automatically shut you down when you run out of material so air does not enter the fluid stream, automatically adjusts power to the pumps to always provide optimal material feed and communicates with the Xcelerator heated hoses to allow independent A and B hose heat adjustments and the option for automatic pressure balancing to improve yield. The Reactor 3 E-20 comes with Core E1 Electric transfer pumps that feature smart supply software that automatically monitors and adjust Reactor 3 proportioner inlet pressures to optimize material feed and on-ratio performance. The Core E1 Electric transfer pumps are up to six times quieter than pneumatic pumps. The Core E1 transfer pumps also include ProConnect technology, where you can quickly disconnect the motor from the pump lower and easily transfer the pump from drum to drum. The Reactor 3 utilizes the Xcelerator hose with fully independent A and B temperature control. With the Xcelerator hose, you can choose from internally heated or externally heated options that include resistance control mode software. Generator, powered by a Briggs and Straton engine, delivers a powerful load center with enough power and then some. The 9 HP compressor provides a dependable air source with enough CFM to run the system and a mixer, allowing you to spray Open and Closed Cell Spray Foam Insulation. The Fusion PC spray foam gun by Graco is the choice of the industry and provides a reliable,easily maintainable and rebuildable SPF gun.


CHOOSE YOUR REACTOR 3 MODEL

STANDARD: Features: Touch Screen ADM, Brushless Motor, Active ISO Lube Pump, Data Download, Small Recirculation valves, Simple Y-strainers, Independent A & B Hose Heat software and Resistance Control Mode software.

PRO: All features of Standard AND: Larger heater options, large easy-access inlet filters, Reactor Connect cell module, large recirculation valves, drum level dipsticks, Auto Pressure Balance, Power Management and Automatic Cellular Software Updates.

ELITE: All features of Pro AND: Katalyst full system control, ratio assurance, inlet temperature & pressure sensors, generator dashboard, optimized for Core E1 transfer pumps, Smart Control Software and Smart Supply Software.

OVERHEAD VIEW

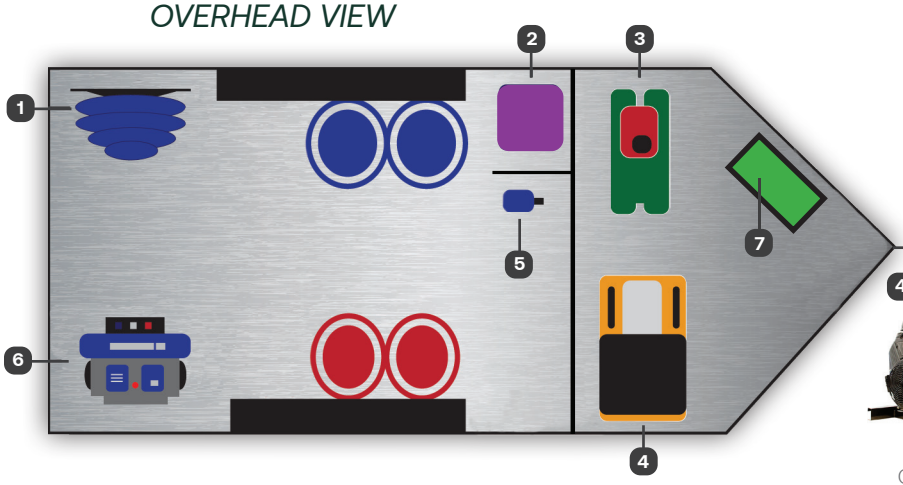

SYSTEM COMPONENTS


1 Graco Xcelerator Independent Heated Hose


2 40 CFM Pure 10 Air Dryer


3 9 HP Compressor


4 22 KW Generator


5 Fusion PC Gun


6 Reactor 3 E-20



7 Fresh Air System

www.sprayfoamsystems.com

Setup in a 8x16 ProPAK trailer, the 200 Slider Series can easily be towed by a 1/2 ton truck. There is plenty of room to carry up to two sets of foam and enough space to store ladders and scaffolding. The standard work bench stores all of your safety equipment.

Backed by the powerful Graco E-20 Reactor, this rig allows you up to 20 lbs. per minute of material output and up to 220' of hose length. This rig is setup to spray open and closed cell spray foams

Stand Alone Unit Powered by an 22,000 Watt Gasoline Generator and Twin Tank 9HP Gasoline Compressor.

Air System includes the SFS 40 CFM Pure 10 air dryer.