

FILL. LIFT. STABILIZE.

BENEFITS & ADVANTAGES OF CONCRETE LIFTING WITH HANDIFOAM®

COST EFFECTIVE Concrete lifting can typically be done for less than half the cost of pouring new concrete.

TIME & LABOR SAVINGS Avoids costly tear-out of existing concrete and disruptive demolition, removal and replacement of slabs while maintaining a smaller application crew.

MINIMAL DOWNTIME The quick cure time using polyurethane foams allows the surrounding areas to remain in use or service during the project.

HIGH PORTABILITY Convenient, self contained kit allows for easy portability to remote locations and sites that equipment cannot access.

THE PROCESS



#1


Concrete slabs that need lifted, stabilized, leveled or more are identified.



#2

Injection holes are drilled into the concrete slabs in areas based on size of the slab, height needed, depth, etc.

HandiFoam is brought in depending on the size and requirements of the job.

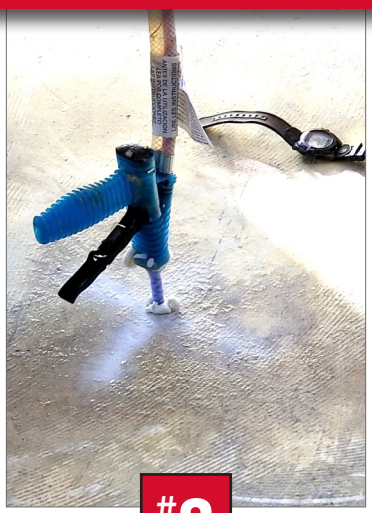

#3

The foam is injected using the Handi-Gun® Dispensing Unit and ColorWise® Temperature Warning Nozzles directly down into the injection holes.



#4

Once the slab has been raised to the appropriate level and foam injection is complete, the drilled holes are sealed with a polymer concrete or cement.

SEE NEXT PAGE FOR RECOMMENDED PRODUCTS!

HANDIFOAM® CONCRETE LIFT

HandiFoam® Concrete Lift Low Pressure Polyurethane Foam is a high-density foam solution engineered to fill voids, lift sunken slabs, and stabilize concrete surfaces. When installed properly, this foam delivers controlled lift, fast cure times, and long-term structural support. HandiFoam Concrete Lift minimizes the overall cost, mess, and downtime of traditional concrete replacement.

Ideal for sidewalks, driveways, patios, warehouse floors, and other load-bearing slabs, HandiFoam Concrete Lift restores uneven concrete safely, efficiently, and cost-effectively.



PART #	DESCRIPTION	SIZE	TYPE	DENSITY	SYSTEM WEIGHT
P12037	HANDIFOAM CONCRETE LIFT	II-115	DISPOSABLE KIT	3.10 LBS/FT^3 (50 KG/M^3)	41 LBS (18.6 KG)

Certified applicator training is strongly recommended for proper use of HandiFoam® Concrete Lift products. Training helps ensure correct application techniques, optimal performance, and jobsite safety—especially for precision concrete lifting and stabilization. Learn more and sign up for training today, by visiting the Masterworks Training page available on www.HandiFoam.com.









ICP Construction, Inc.
150 Dascomb Road | Andover, MA 01810
866.667.5119 | www.icpgroup.com

Reach out to a HandiFoam representative today for more information!